


COD. 21.61 - COD. 21.62

ELECTROFUSION TRANSITION SOCKET WITH BRASS INSERT

MALE SDR 7,4 - PN 25

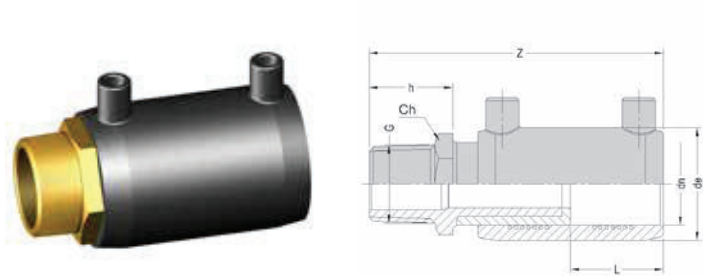

DIMENSIONS							WEIGHTS	
dn	G	de	L	h	Z	Ch		
20	½"	33	33	20	96	22		75
25	¾"	38	33	21	97	27		100
32	1"	46	38	26	111	34		229
40	1" ¼	56	44	29	124	42		363
50	1" ½	68	49	33	139	52		532
63	2"	82	54	37	158	65		889
75	2" ½	99	60	43	173	86		1431
90	3"	116	65	46	190	97		2085
110	4"	145	70	52	204	125		3110


Ch = tightening key size

WELDABILITY ON PIPE/FITTING PE 100

dn	SDR 17	SDR 11	SDR 9	SDR 7,4
20		● ▲	● ▲	●
25		● ▲	●	●
32	● ▲	●	●	●
40	● ▲	●	●	●
50	●	●	●	●
63	●	●	●	●
75	●	●	●	●
90	●	●	●	●
110	●	●	●	●

- weldable only with monovalent welding units Series Euro
- ▲ minimum weldable thickness 3 mm

FEMALE SDR 7,4 - PN 25

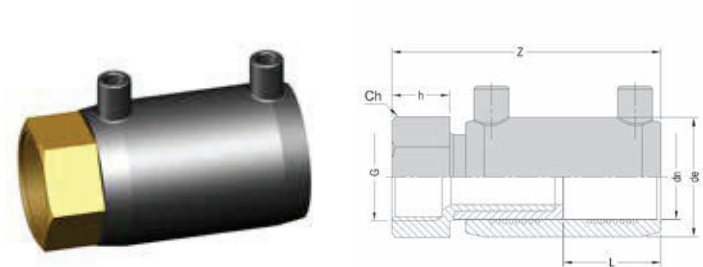

DIMENSIONS							WEIGHTS	
dn	G	de	L	h	Z	Ch		
20	½"	33	33	18	94	27		136
25	¾"	38	33	20	96	34		186
32	1"	46	38	22	107	40		256
40	1" ¼	56	44	27	122	50		465
50	1" ½	68	49	27	133	55		560
63	2"	82	54	33	154	67		882
75	2" ½	99	60	39	169	86		1445
90	3"	116	65	42	186	97		1990
110	4"	145	70	48	200	125		3170

Ch = tightening key size

WELDABILITY ON PIPE/FITTING PE 100

dn	SDR 17	SDR 11	SDR 9	SDR 7,4
20		● ▲	● ▲	●
25		● ▲	●	●
32	● ▲	●	●	●
40	● ▲	●	●	●
50	●	●	●	●
63	●	●	●	●
75	●	●	●	●
90	●	●	●	●
110	●	●	●	●

- weldable only with monovalent welding units Series Euro
- ▲ minimum weldable thickness 3 mm

- _ During the screwing, lock the metallic hexagon to avoid any stress on the PE part
- _ Suitable for gas 🟡 and water 🔵 pipelines
- _ Do not remove the insert